




Item # _____

60" Restaurant Ranges



Model # IR-6R624



New standard Anti-Clogging burner head is shown. Anti-clogging pilot shield is designed into the top grate.

Standard Features

- NEW** Quad Burner options: (1) Anti-Clogging burner with full flame and a 7,000 BTU low simmer is standard; (2) All-Purpose (3) Sauté and (4) Wok Jet.
- NEW** 28,000 BTU lift-off burner heads for high performance cooking and easy cleaning.
- NEW** Anti-clogging pilot shield is designed into top grate.
- NEW** Chef's depth (26" D) standard oven allows 18" x 26" sheet pans to be rotated left-to-right and front-to-back.
- NEW** Stamped inner door provides better heat retention.
- NEW** "U"-shaped burner and unique burner baffle distributes heat flow evenly throughout the oven.
- Stainless steel front, ledge, sides, backguard and shelf.
- 12" x 12" heavy duty cast iron top grates remove easily and safely. Cast-in bowl directs heat to the cooking surface.
- Top grate design allows pots to easily slide from section to section.
- 5" wide stainless steel landing ledge provides a functional working area.
- 26 1/2" wide oven is porcelainized on five contact surfaces for easy cleaning.
- One year parts and labor warranty.
- AGA and CGA design certified, NSF and CE listed.


60" Restaurant Ranges

Imperial provides as standard many of the optional upgrades normally offered at a premium on other range lines. These ranges offer new features that provide optimal performance, value and reduce operating costs.

The 28,000 BTU burner heads lift off for easy cleaning and are available in four high performance styles: the Anti-Clogging burner head is standard. All-Purpose, Sauté and Wok Jet burner heads are optional. Burner heads are interchangeable to provide the flexibility of matching the burner style to the specific cooking need. An anti-clogging pilot design saves maintenance costs. A unique Chef's depth 26" standard oven accommodates 18" x 26" sheet pans front-to-back and left-to-right. For easy cleaning, the oven interior is porcelainized on all five contact surfaces. An innovative dual heat deflector system provides an even heat flow pattern throughout the 35,000 BTU oven. Cast iron top grates are designed in 12" x 12" sections to be removed easily.



60" Restaurant Ranges

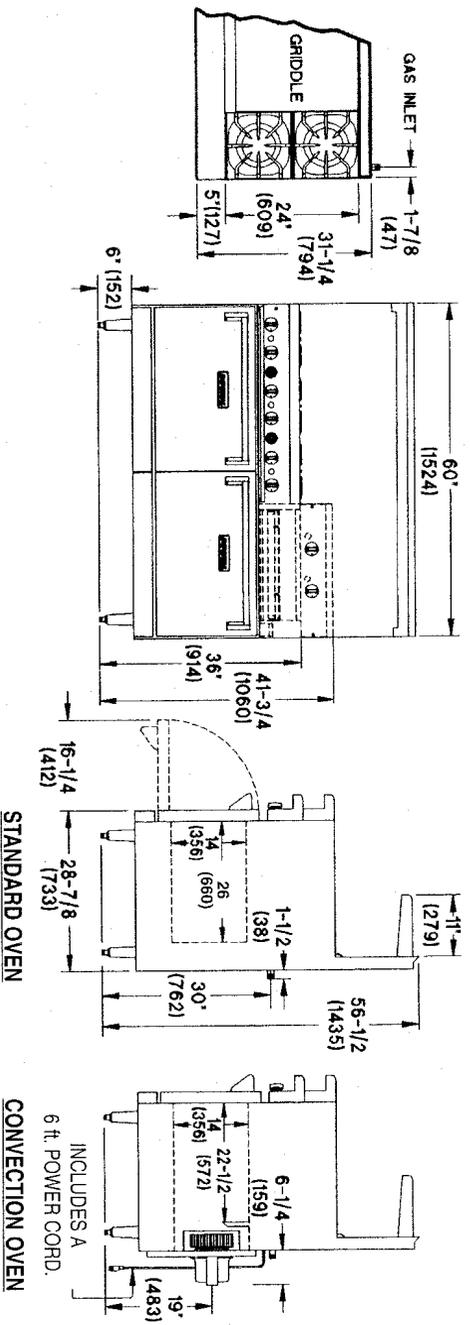

60" Restaurant Ranges

Top Configuration	Model#	Top	Description	Base	Oven Depth	Total B.T.U.	Ship Weight (Kg) (Lbs)
	IR-10	(10) Open Burners	- w/(2) 26 1/2" W Standard Ovens	- w/(2) 26 1/2" W Standard Ovens	26"	350,000	444 980
			- w/(2) 26 1/2" W Convection Ovens	- w/(2) 26 1/2" W Convection Ovens	22 1/2"	340,000	493 1090
	IR-6-G24	(6) Open Burners with (1) 24" Griddle	- w/(1) 26 1/2" W Standard Oven and (1) Open Cabinet	- w/(1) 26 1/2" W Standard Oven and (1) Open Cabinet	26"	315,000	425 940
			- w/(2) 26 1/2" W Standard Ovens	- w/(2) 26 1/2" W Standard Ovens	22 1/2"	278,000	480 1060
	IR-4-G36	(4) Open Burners with (1) 36" Griddle	- w/(2) 26 1/2" W Standard Ovens	- w/(2) 26 1/2" W Standard Ovens	26"	268,000	530 1170
			- w/(2) 26 1/2" W Convection Ovens	- w/(2) 26 1/2" W Convection Ovens	22 1/2"	243,000	457 1010
	IR-2-G48	(2) Open Burners with (1) 48" Griddle	- w/(1) 26 1/2" W Standard Oven and (1) Open Cabinet	- w/(1) 26 1/2" W Standard Oven and (1) Open Cabinet	26"	242,000	491 1085
			- w/(2) 26 1/2" W Standard Ovens	- w/(2) 26 1/2" W Standard Ovens	22 1/2"	232,000	540 1195
	IR-G60	(1) 60" Griddle	- w/(1) 26 1/2" W Standard Ovens	- w/(1) 26 1/2" W Standard Ovens	26"	207,000	468 1035
			- w/(2) 26 1/2" W Standard Ovens	- w/(2) 26 1/2" W Standard Ovens	22 1/2"	196,000	540 1195
	IR-6-RG-24	(6) Open Burners with (1) 24" Raised Griddle/Broiler	- w/(1) 26 1/2" W Standard Oven and (1) Open Cabinet	- w/(1) 26 1/2" W Standard Oven and (1) Open Cabinet	26"	170,000	505 1115
			- w/(2) 26 1/2" W Standard Ovens	- w/(2) 26 1/2" W Standard Ovens	22 1/2"	160,000	554 1225
	RG	(6) Open Burners with (1) 24" Raised Griddle/Broiler	- w/(1) 26 1/2" W Standard Ovens	- w/(1) 26 1/2" W Standard Ovens	26"	135,000	481 1065
			- w/(2) 26 1/2" W Standard Ovens	- w/(2) 26 1/2" W Standard Ovens	22 1/2"	278,000	496 1095
	RG	(6) Open Burners with (1) 24" Raised Griddle/Broiler	- w/(2) 26 1/2" W Standard Ovens	- w/(2) 26 1/2" W Standard Ovens	26"	268,000	540 1195
			- w/(1) 26 1/2" W Standard Oven and (1) Open Cabinet	- w/(1) 26 1/2" W Standard Oven and (1) Open Cabinet	22 1/2"	243,000	468 1035

Note: Add "C" to model number for 26 1/2" W Convection Oven. Add "CC" for (2) 26 1/2" W Convection Ovens.

Add "XB" for Open Cabinet and (1) 26 1/2" W Standard Oven model. Add "C-XB" to model number for Open Cabinet and (1) 26 1/2" W Convection Oven. Crated Dimensions: 39" (991mm) D x 35" (889mm) H x 62 1/2" (1585mm) W

Standard Exterior Finish

■ **Stainless Steel:** Front oven door, sides, landing ledge, backguard with shelf, control panel and kick plate. Welded stainless steel seams.

■ **Control Knobs:** Durable cast metal, polished chrome finish.

Range Tops

■ **Open Burners:** 28,000 BTU/hr. lift-off burner heads. No gaskets, no screws. Four interchangeable burner heads available:

Anti-Clogging is standard; the All-Purpose, Sauté and Wok Jet burner heads are optional. One standing pilot for each burner. Removable one piece drip tray.

■ **Top Grates:** 12" x 12" lift-off sections, heavy-duty cast iron. Cast-in bowl directs heat upward. Top grate design includes an anti-clogging pilot shield.

■ **Gridles:** Highly polished 3/4" plate with 3" wide stainless steel grease trough. 20,000 BTU burner for every 12" of griddle surface. Located on left side of range top. Manual controls are standard, thermostatic controls are optional.

■ **Raised Griddle with Broiler:** Available in 12", 24" and 36" widths. 3/4" plate with manual control only. 20,000 BTU/hr. burner with heat deflector every 12". Located on right side of range top. Large griddle grease can. Chrome plated broiler rack is removable. Large full width broiler drip tray.

■ **Hot Tops:** Heavy-duty casting with heat retaining projections underneath to absorb and diffuse heat. One 20,000 BTU/hr. "U"-shaped burner every 12". Manual controls. Polished surface.

Oven Specifications

■ **Chef's Depth Standard Oven:** 26 1/2" wide x 26" deep x 14" high. 12 gauge construction with welded front frame. Fully insulated with non-sag fiberglass. Porcelainized oven interior includes: sides, rear, deck and door linings. Oven "U" burner provides 35,000 BTU/hr. One heavy-duty locking chrome plated rack.

■ **Convection Oven:** 26 1/2" wide x 22 1/2" deep x 14" high, 1/4 HP, 1725 RPM blower motor (120VAC, 60 HZ - 1Ph) with 5 amp draw. Three-position switch for cooking or cool down; burner "on" indicator light; and one hour manual timer. Each 26 1/2" oven is equipped with 30,000 BTU/hr. "U" burner with electronic ignition. Three chrome plated racks and guides per oven.

■ **Controls:** Thermostat adjustable from 150°F to 500°F.

■ **Optional Items:** Extra chrome rack, reinforcement channels for mounting cheese melter/salamander, thermostatic controls for griddles; grooved griddles; stainless steel stub backs; and casters.

■ **Gas:** Manifold pressure is 5.0" W.C. for natural gas or 10.0" for propane gas. Manifold size 3/4" NPT. 3/4" pressure regulator supplied with equipment to be installed at time of connection.

■ **Clearance:** For use only on non-combustible floors. Legs or casters are required for non-combustible floors; or 2" overhang is required when curb mounted. Provide 0" clearance from non-combustible surfaces and 8" from combustible surfaces.

IMPERIAL Commercial Cooking Equipment

1560 Flower St., Duarte, CA 91010 Phone (626) 357-7411 FAX (626) 359-5909 E-Mail imppts@imperialrange.com Website imperialrange.com
202-RR-4 Imperial reserves the right to change materials and specifications without notice. ©1999 Imperial Commercial Cooking Equipment. Printed in the U.S.A.