



# POTATO PEELER PP-6+ 230-400/50/3 ·370W

Output: 6 Kg. per cycle. Aluminium made potato peeler.



P/N 1000410



## FEATURES AND BENEFITS

Aluminium body potato peeler. Abrasive peeling. The abrasive is highly resistant and long lasting.

- ✓ Base Plate and chamber walls lined with abrasive.
- ✓ Aluminium body.
- ✓ PPC: Equipped with attachment drive to power accessories.
- ✓ Directable cylinder.
- ✓ Integral control panel complete with on/off push buttons and a 0-6 minute timer.

## SALES DESCRIPTION

PPC: Equipped with attachment drive to power accessories.

## INCLUDES

✓

## ACCESSORIES

- Vegetable preparation attachment CR-143
- Meat mincer attachment HM-71
- Potato masher attachment P-132
- Stands for potato peelers
- Filters for potato peelers



[www.sammic.co.uk](http://www.sammic.co.uk)

Food Service Equipment Manufacturer

Unit 2, Trevanah Road  
Troon Industrial Park  
LE4 9LS - Leicester

[uksales@sammic.com](mailto:uksales@sammic.com)  
Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

DYNAMIC PREPARATION  
COMMERCIAL POTATO PEELERS

product sheet  
updated 01/08/2018



# POTATO PEELER PP-6+ 230-400/50/3 ·370W

Output: 6 Kg. per cycle. Aluminium made potato peeler.



## SPECIFICATIONS

- Hourly production: 120 Kg / 150 Kg
- Capacity per load: 6 Kg
- Timer (min-max): 0 ' - 6 '
- Total loading: 370 W
- Plate speed: 317 rpm
- Electric power supply (V) : 230 V - 400 V / 50 Hz / 3 ~ (1.9 A-1.1 A)
- Plug: -

### External dimensions (WxDxH)

- ✓ Width: 395 mm
- ✓ Depth: 700 mm
- ✓ Height: 433 mm




### External dimensions with stand

- ✓ Width with stand: 411 mm
- ✓ Depth with stand: 700 mm
- ✓ Height with stand: 945 mm

Net weight: 31 Kg

### Crated dimensions

440 x 710 x 470 mm  
Gross weight: 33.5 Kg.

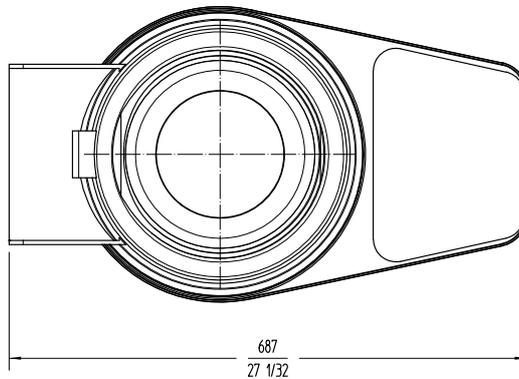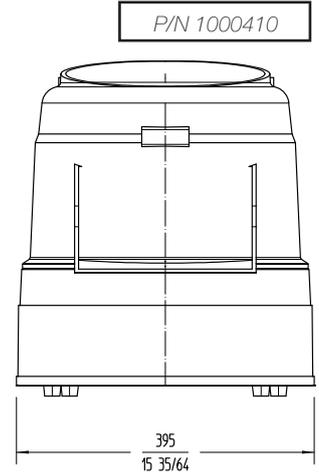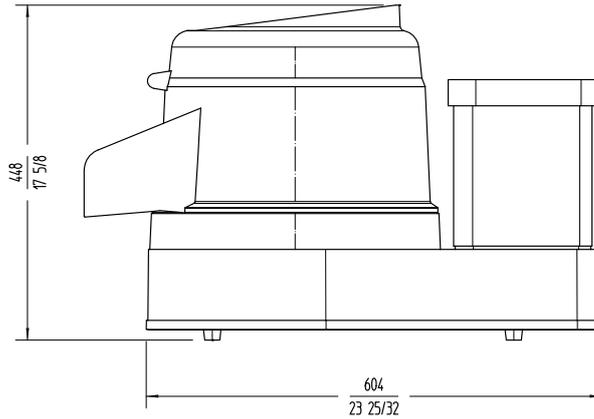

DYNAMIC PREPARATION  
COMMERCIAL POTATO PEELERS



[www.sammic.co.uk](http://www.sammic.co.uk)

Food Service Equipment Manufacturer

Unit 2, Trevanah Road  
Troon Industrial Park  
LE4 9LS - Leicester

[uksales@sammic.com](mailto:uksales@sammic.com)  
Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

product sheet  
updated 01/08/2018