

TRCB-48-HC

Under-Equipment Refrigerator, 2 Drawers



Dimensions	
External Width (mm)	1227
External Depth (mm)	816
External Height (mm)	645
Exclusions	Depth does not include 26 mm for rear bumpers.
Net Volume (Litres)	52
Gross Volume (Litres)	252
Per Drawer Capacity (max depth mm)	2x 1/1 GN (100)
Unpackaged Weight (kg)	118
Packaged Weight (kg)	129
Packaged Dimensions (W x D x H mm)	1372 x 889 x 749
Supplied Supports	Ø 102 mm castors (127 mm height)

Build	
Number of Drawers	2
Exterior Construction	Stainless steel front and top, aluminium sides and rear
Interior Construction	Clear coated aluminium, stainless steel base
Air Intake Position	Front
Ventilation Position	Right side
Clearance Required	26 mm rear, 26 mm right side. Minimum clearance of 102 mm is required between bottom of cooking equipment heating element and the TRCB top.
Cord Length (Meters)	2.13
Max Weight Supported (kg)	326
Standard w/ Locks	Not standard (build option)

Technical	
Temperature Holding	0.5 : 3.3°C
Refrigerant	R290
Voltage / Frequency / Phase	220-240V/50-60Hz/1
Amps	1.1
Wattage	253
Climate Class	5
Operating Statement	Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C.
Testing Standard	EN 16825
EEC	C
EEl	42.4
kWh/24hr	2.235
kWh/Annum	816
Defrost Type	Auto



Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
Europe
Australia




0800 783 2049
+49 (0) 7622 6883 0
+61 2 9619 9999

TFIUK@truemfg.com
TrueGermCustomerService@truemfg.com
TrueRefAus@truemfg.com



TRCB-48-HC

Under-Equipment Refrigerator, 2 Drawers

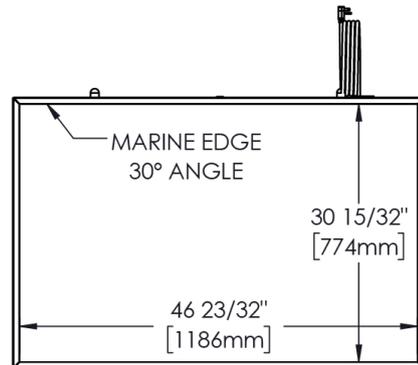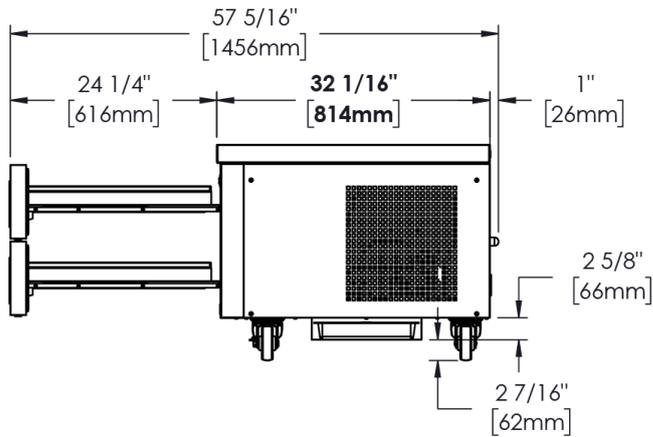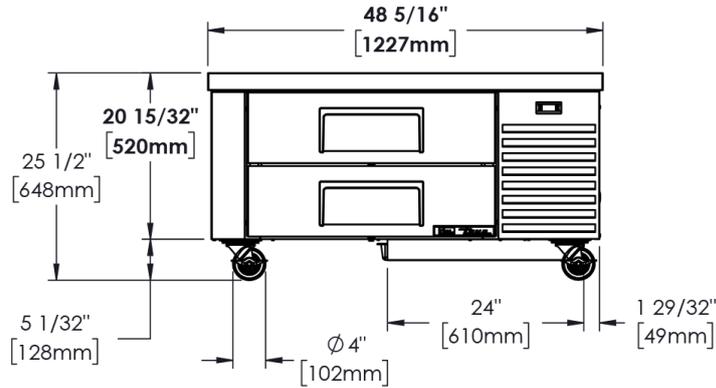

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
Europe
Australia

0800 783 2049
+49 (0) 7622 6883 0
+61 2 9619 9999

TFIUK@truemfg.com
TrueGermCustomerService@truemfg.com
TrueRefAus@truemfg.com

