

TRCB-72-HC

Under-Equipment Refrigerator, 4 Drawers



Dimensions	
External Width (mm)	1839
External Depth (mm)	816
External Height (mm)	645
Exclusions	Depth does not include 26 mm for rear bumpers.
Net Volume (Litres)	104
Gross Volume (Litres)	425
Per Drawer Capacity (max depth mm)	2x 1/1 GN (100)
Unpackaged Weight (kg)	186
Packaged Weight (kg)	197
Packaged Dimensions (W x D x H mm)	2032 x 914 x 775
Supplied Supports	Ø 102 mm castors (127 mm height)

Build	
Number of Drawers	4
Exterior Construction	Stainless steel front and top, aluminium sides and rear
Interior Construction	Clear coated aluminium, stainless steel base
Air Intake Position	Front
Ventilation Position	Right side
Clearance Required	26 mm rear, 26 mm right side. Minimum clearance of 102 mm is required between bottom of cooking equipment heating element and the TRCB top.
Cord Length (Meters)	2.13
Max Weight Supported (kg)	492
Standard w/ Locks	Not standard (build option)

Technical	
Temperature Holding	0.5 : 3.3°C
Refrigerant	R290
Voltage / Frequency / Phase	220-240V/50-60Hz/1
Amps	2
Wattage	460
Climate Class	5
Operating Statement	Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C.
Testing Standard	EN 16825
EEC	D
EEl	56.8
kWh/24hr	3.199
kWh/Annum	1168
Defrost Type	Auto



Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
Europe
Australia


0800 783 2049
+49 (0) 7622 6883 0
+61 2 9619 9999

TFIUK@truemfg.com
TrueGermCustomerService@truemfg.com
TrueRefAus@truemfg.com



TRCB-72-HC

Under-Equipment Refrigerator, 4 Drawers

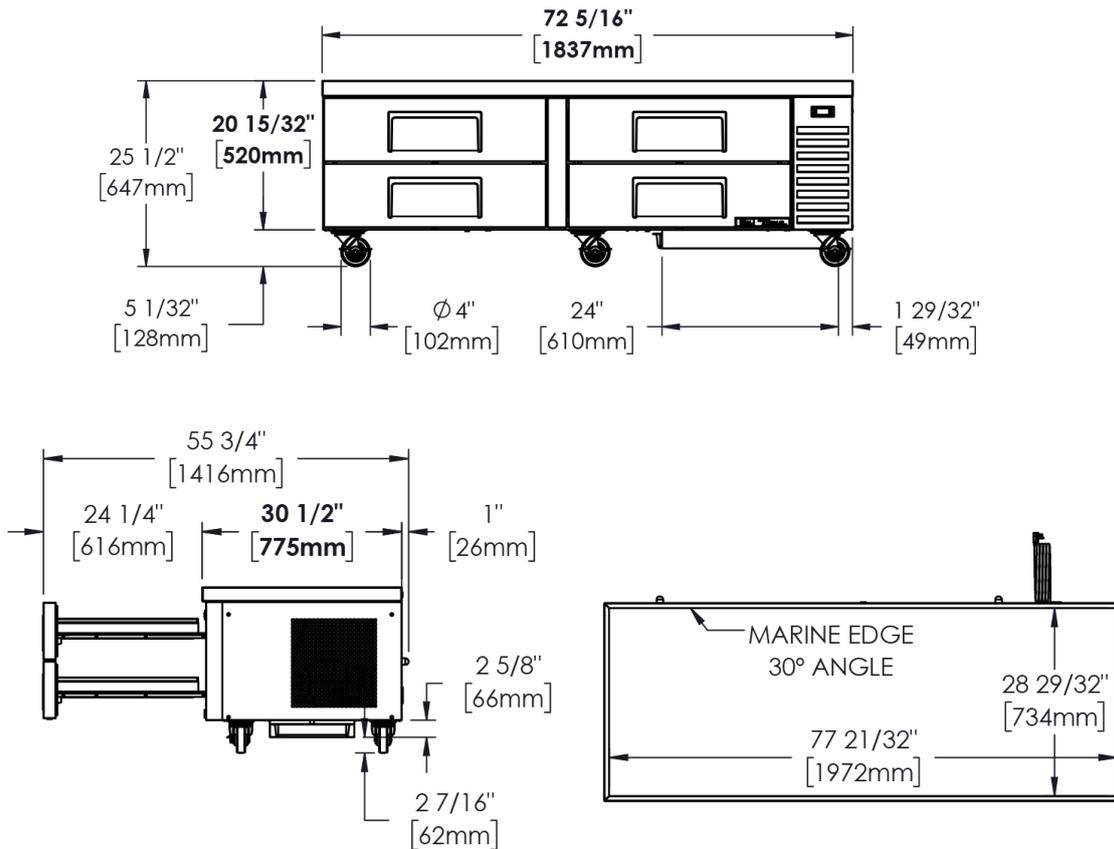

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
Europe
Australia

0800 783 2049
+49 (0) 7622 6883 0
+61 2 9619 9999

TFIUK@truemfg.com
TrueGermCustomerService@truemfg.com
TrueRefAus@truemfg.com

