



## Usage Areas




## Technical Information

Daily Production Capacity	32 kg/33 kg	Finish	AISI 304 SS
Store Capacity	16 kg	Cooling System	Air
Ice Capacity Per Cycle	28 Adet	Product Dimension w*d*h	500*580*690
Refrigerant Gas	R452a/R290	Packing Dimension w*d*h	555*635*855
Current	10 A	Net Weight	38 kg
Maximum Power	500 W/470 W	Loading Quantities 20 DC	72 Units
Daily Electric Consumption	9,0 kW/8,5 kW	Loading Quantities 40 DC	216 Units
Voltage	230V-50/60Hz/230V-50Hz 115V-60 Hz/115V-60 Hz	Loading Quantities Optima	279 Units

## Special Features



## Ice Cubes and Sizes






18 gr/unit

## Certifications





## Product Dimensions

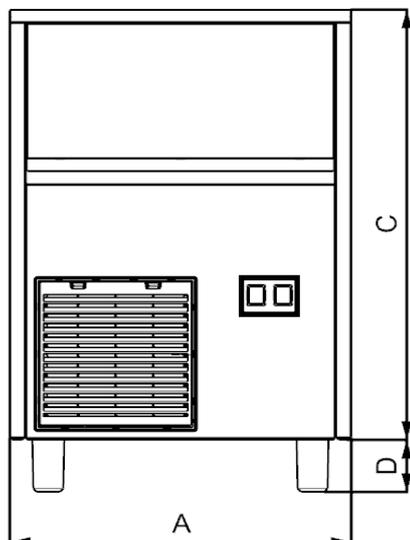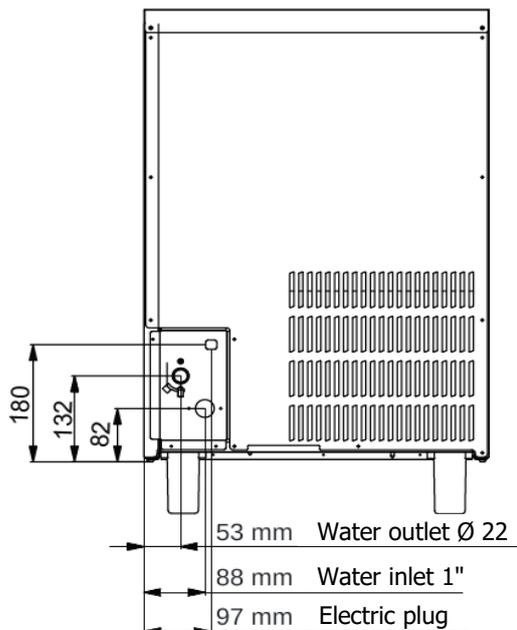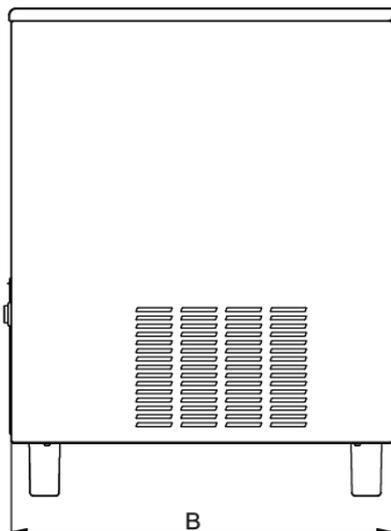

Model	A (mm)	B (mm)	C (mm)	D (mm)	Weight
UA026	355	434	590	D2	26 kg
UA027	500	580	690	D1	38 kg
UA028	500	580	800	D1-D2	45 kg
UA029	738	600	822	D1-D2	85 kg

Option	D (mm)	
Standard Adjustable Feet	D1	78,5
Short Adjustable Feet	D2	10

## Limits

- Water inlet 1"
- Water outlet 22 mm
- Water Pressure Min 1 Bar/Max 5 Bar

All technical informations must be considered as following conditions

Ambient temperature 20°C

Water temperature :15°C

Electric consumption at :+32 °C (Standard Voltage)

The company has right to change all informations without notification

## Ice Making Capacities

R452a

Ambient Tem. °C	Water Temperature °C			
	10°	15°	21°	32°
10°	100%	98%	95%	93%
21°	98%	96%	90%	87%
32°	90%	87%	80%	78%
38°	80%	75%	70%	60%

R290

Ambient Tem. °C	Water Temperature °C			
	10°	15°	21°	32°
10°	100%	98%	95%	93%
21°	98%	96%	90%	87%
32°	90%	87%	80%	78%
38°	80%	75%	70%	60%