



## i9085 Four Zone Induction Boiling Top



### Short Form Specification

Unit to be Falcon F900 Series induction counter top having 4 x 5kW cooking zones. Unit to be supplied upon adjustable feet or upon an open base stand.

The hob will be constructed from 6mm toughened ceramic glass and 2mm 304 grade stainless steel. Hobs will be laser cut with right-angled edges to allow joining of units with no gaps between hobs. Exterior panels are Scotch Brite finish stainless steel.

Control knobs to be marked showing zone variable control settings and to have a bezel behind each knob to prevent water ingress. The unit will have IPX 5 water resistance certification.

### Key Features

- 4 x 5kW energy efficient heat zones
- 6mm toughened glass hob
- In-bulit pan detection - no utensil, no heat
- Low heat emission
- Variable control settings
- IPX 5 water resistance certification
- Supplied upon adjustable stainless steel feet
- 2mm thick 304 grade stainless steel hob
- Laser cut hob allows edge to edge joining of units
- Stainless steel external panels with Scotch Brite finish
- Dynamic Link System Compatible



Integrated linking system allows quick and easy installation to create a continuous cookline.


*Patent pending, application no. GB 1511389.7*

### Accessories

- Hob extension rail
- Fixed or mobile stands

## i9085 Four Zone Induction Boiling Top

### Model Dimensions (mm)

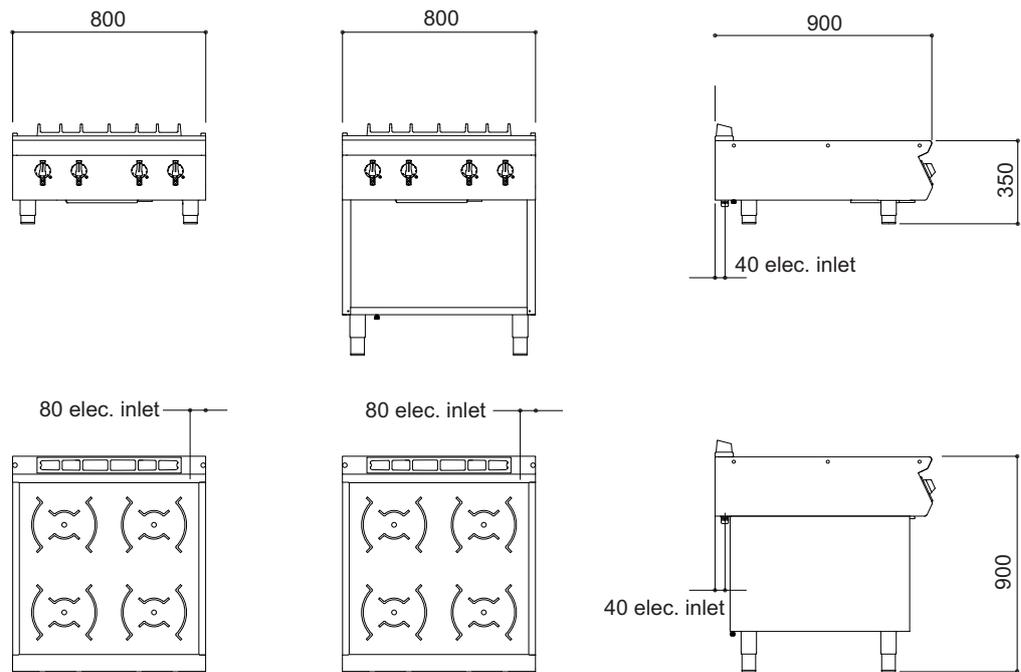

### Specification Details

Electrical rating (kW)	20
Electrical supply voltage (V)	400V 3N~
Required electrical supply (A)	32
Electrical current split (A)	L1: 28.9 / L2: 28.9 / L3: 28.9
Zone rating (kW)	4 x 5
Weight (kg)	66
Packed weight (kg)	82
Packed dimensions (mm)	850 (w) x 970 (d) x 775 (h)

#### Installation Note:

Please consult local legislation with regard to installation of cooking equipment.