

50Hz

iT0750 Ice Cube Machine

Model: IDT0750A IYT0750A IYT0750W



Indigo NXT Series iT0750 Ice Machine on a D570 Bin

Designed for operators who know that ice is critical to their business, the Indigo®NXT Series ice machine's preventative diagnostics continually monitor itself for reliable ice production. Improvements in cleanability and programmability make your ice machine easy to own and less expensive to operate.

- **easyTouch® Display** - New icon based touch screen takes the guess work out of owning and operating an ice machine.
- **Multiple Language Capability** - The easyTouch display is available in multiple languages selected in the initial start-up installation Wizard.
- **Programmable Ice Production** - Now its super easy to program your ice machine to be off at certain times of the day to save money with fluctuating electrical rates. Also programmable by daily ice production volume.
- **Easy to Clean Foodzone** - Hinged front door swings out for easy access. Removable water-trough, distribution tube, curtain, and sensing probes for fast and efficient cleaning. Select components made with AlphaSan® antimicrobial.
- **Intelligent Diagnostics** - provide 24 hour preventative maintenance and diagnostic feedback for trouble free operation.
- **Acoustical Ice Sensing Probe** - Unique patented technology allows for reliable operation in challenging water conditions and environments.
- **DuraTech™ Exterior** - provides superior corrosion resistant above stainless steel. Innovative clear-coat resists fingerprints and dirt making it easier to keep clean.
- **Available Lumince II Virus & Bacteria Inhibitor**- Controls viruses, bacteria, mold and yeast within the foodzone to keep the machine clean longer. A new sanitation icon lets you know the operational status.
- **Active sense:** insures consistent ice harvest in all environmental conditions. This software solution works in conjunction with the acoustical ice sensing probe improving reliability and performance.

Ice Machine Electric

230/50 /1

Minimum circuit ampacity: Air Cooled: 6.7
Water Cooled: 6.5

Maximum fuse size: Air Cooled: 15
Water Cooled: 15

Power Load: Max: 1,403 W Average: 1,179 W



Specifications

BTU Per Hour:
12,800 (average)
13,700 (peak)

Refrigerant:
R410 CFC-free
Reduces Global Warming by 48%

Operating Limits:

- Ambient Temperature Range: 40° to 119° F (4.4 to 43.3 C)
Water Temperature Range: 40° to 90° F (4.4 to 32.2 C)
- Water Pressure Ice Maker Water In: Min. 20 psi (137.9 kPa)
Max. 80 psi (551.1 kPa)

Ice Shape



Half Dice
3/8" x 1 1/8" x 7/8"
(.95 x 2.86 x 2.22 cm)
Cube weight 5.7 g



Dice
7/8" x 7/8" x 7/8"
(2.22 x 2.22 x 2.22 cm)
Cube weight 8.5 g

iT0750 Ice Cube Machine



COMPANY WITH QUALITY SYSTEM
ISO 9001: 2015

6643B 03/20




50Hz

iT0750 on D570 Storage Bin

- Ⓐ Electrical Entrance (2) Options
- Ⓑ 3/8" (0.95 cm) F.P.T. Water Condenser Inlet (water-cooled units)
- Ⓒ 1/2" (1.27 cm) F.P.T. Water Condenser Outlet (water-cooled units)
- Ⓓ 1/2" (1.27 cm) Auxillary Base Drain Socket
- Ⓔ 3/8" (0.95 cm) F.P.T. Ice Making Water Inlet
- Ⓕ 1/2" (1.27 cm) F.P.T. Ice Making Water Drain
- Ⓖ 3/4" (1.91 cm) Bin Drain

Installation Note
Minimum installation clearance:

Top/sides: 8" (20.32 cm); Back is 5" (12.7 cm)

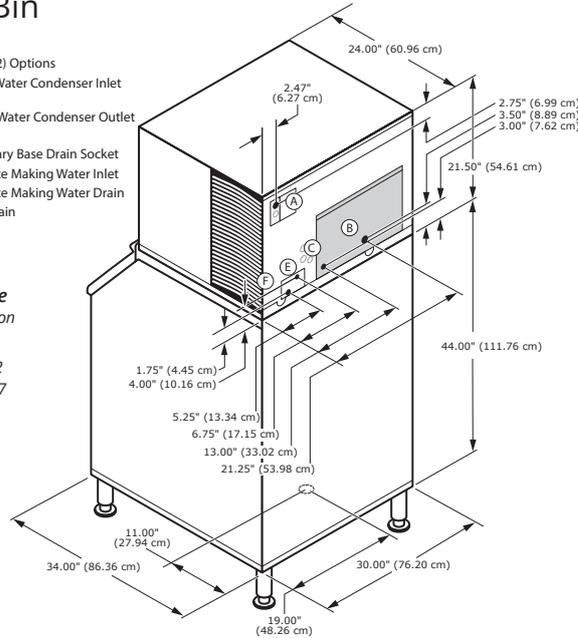

Space-Saving Designs



	iT0750 D400	iT0750 D570
Height	59.50" 151.13 cm	71.50" 181.61 cm
Width	30.00" 76.20 cm	30.00" 76.20 cm
Depth	34.00" 86.30 cm	34.00" 86.30 cm
Bin Storage	365 lbs. 165.7 kgs	543 lbs. 241.1 kgs

Height includes adjustable bin legs 6.00" to 8.00", (15.24 to 20.32 cm) set at 6.00" (15.24 cm).
Bin capacity is based on 90% of the volume x 33 lbs/ft³ average density of ice

Specifications

	Model	Ice Shape	Ice Production 24 Hours		Power Usage kWh / 45.4 kgs / 100 lbs. @ 32° Air / 21° C Water 90° Air / 70° F Water	Potable Water Usage/100 lbs. 45.4 kgs of Ice
			70° Air / 50° F Water 21° Air / 10° C Water	90° Air / 70° F Water 32° Air / 21° C Water		
AIR-COOLED	IDT0750A	dice	595 lbs.	485 lbs.	4.72	20.0 Gal.
			270 kgs	220 kgs		75.7 L
	YIT0750A	half-dice	625 lbs.	507 lbs.	4.72	20.0 Gal.
WATER-COOLED	YIT0750W	half-dice	687 lbs.	604 lbs.	3.31	20.0 Gal.
			312 kgs	274 kgs		75.7 L

* Water-cooled Condenser Water Usage / 100 lbs. / 45.4 kgs Of Ice: 135 gal. / 511 L.

Order ice storage bin separately.
This product is hermetically sealed and contains fluorinated greenhouse gas R410A

Accessories

Luminice® II Virus and Bacteria Inhibitor

controls viruses and bacteria inside the ice machine.



External Scoop holder

Protect the ice scoop with the NSF approved versatile scoop holder.



Arctic Pure® Water Filters

Reduces sediment and chlorine odors for better tasting ice.



Manitowoc reserves the right to make changes to the design or specifications without prior notice.